



) EYE-LCD-6500-LE

eyevis LCD Series

) PRODUCT DESCRIPTION

eyevis' new 65" Full-HD Edge-LED LCD Monitor
 The new EYE-LCD-6500-LE display represents the latest version from eyevis professional edge-LED display versions. It combines ultra-high resolution, unparalleled image quality with a slim design and low consumption for a wide range of digital signage and control-room application.

With eyevis' unique optical enhanced treatment, it not only provides clear viewability, but also ensures added durability and strength in almost every ambient light condition.



Thanks to the plain design the displays are the ideal surface for the presentation of your image content.

) ADVANTAGES OF THE EYE-LCD-6500-LE

-) Superior Resolution & High Brightness**
Full-HD 1080p (1920 x 1080)
-) Ultra-Wide Viewing Angle**
178 degree viewing angle horizontally & vertically
-) IRFM™**
Image Retention Free Modulator technology helps prevent image retention

-) Slim Design & lower power consumption**
Only 53mm installation depth, minor power consumption thanks to Edge-LED backlight technology
-) Wide Compatibility**
Extensively tested with a variety of analog/digital PC and video modes.
-) Durable and Professional Design**
All metal structure, Sleek & low-key look that makes the content stand out

) DIMENSIONS

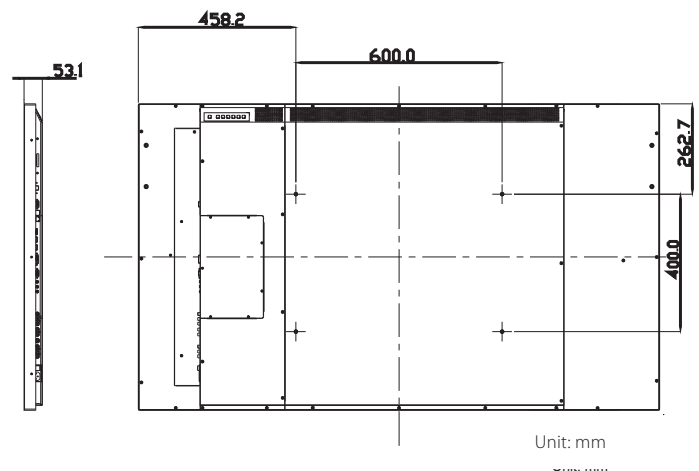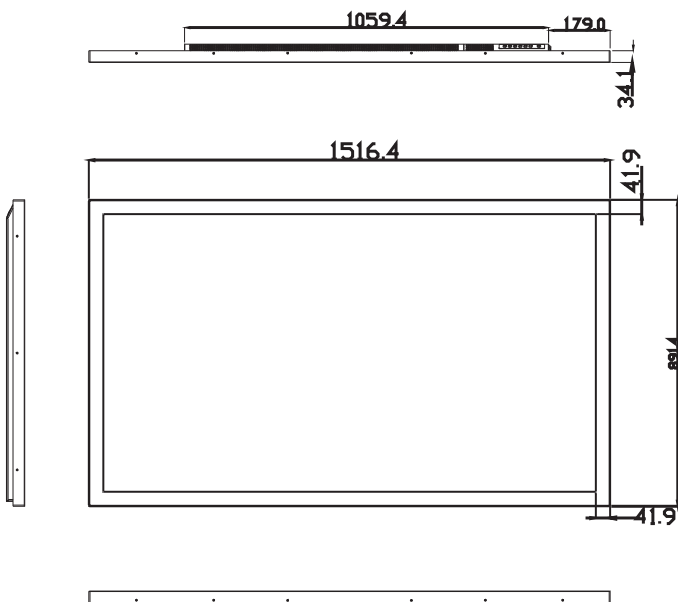

) EYE-LCD-6500-LE

) TECHNICAL SPECIFICATIONS

) LCD Screen

Brightness	360 cd/m ²
Contrast Ratio	4000:1
Viewing Angle	H:178° / V:178°
Response Time	8 ms (GTG)
Supported Colors	1.07 G Colours
Display Resolution	1920 x 1080 (16:9)
Display Frame Rate	60Hz
24/7 Operation [®]	Yes (recommended operation: 20/7)

) Signal Compatibility / Connectivity

Horizontal Frequency	23 ~ 92 KHz / 49 ~ 86 Hz (Analog) 15 ~ 94 KHz / 23 ~ 85 Hz (Digital)
Input Resolution	1920 x 1080 @ 60Hz (Analog) 1920 x 1080 @ 60Hz (Digital)
Connector	DisplayPort / 2 x HDMI 1.3c / VGA / DVI / Component / S-Video / AV
Audio Out	Line Out
Communication Port	RS232C In, Ethernet

) Mechanical

Dimensions	1517 x 892 x 53 mm (59.72 x 35.1 x 2.1 inch)
Weight	Net: 57 kg / 125.7 lbs Gross: 69.1 kg / 152.3 lbs)
Wall / Arm Mount Type	400 x 600 mm VESA
Fanless Design	Yes

) OSD Functions

OSD Control	RS232C, Push Button, IR Remote Controller
OSD Language	English, Chinese
OSD Key Lock	Yes
Multimedia Function	PIP, PBP (side by side), Zoom
Source Auto Detect Function	Yes
OSD Key Lock Function	Yes

) Electrical

Power Supply	AC in: AC 100V ~ 240V (50/60 Hz)
Normal Operation	≤ 290W (typ.)
Power Off	≤ 1 W (typ.)
Speaker	4Ω / 10 Wx2


) Environmental

Operating Temperature	0° ~ 35°, 35% ~ 75% RH
Storage Temperature	-20° ~ 60°, 35% ~ 75% RH

) Options

Touch	Optical Touch
Other	Metal Stands, Wall Mounts, etc.

) INPUTS & OUTPUTS

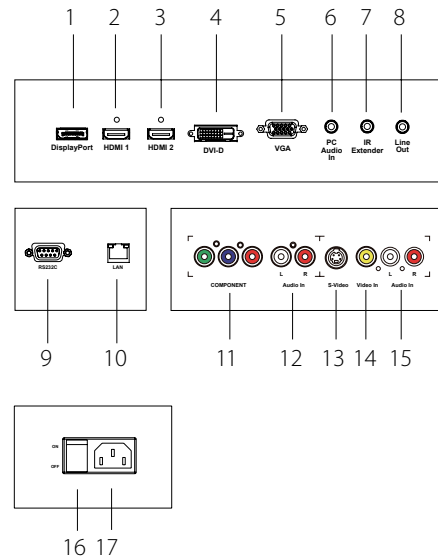

1. DisplayPort
2. HDMI 1
3. HDMI 2
4. DVI-D
5. VGA
6. PC Audio In
7. IR Extender
8. Line Out
9. RS232C
10. LAN
11. Component
12. Audio In (Component)
13. S-Video
14. Video
15. Audio In (S-Video/Video)
16. Power Switch
17. AC In

[®]Electronic components designed for 24/7 operation. Prolonged display of static image contents may affect the display quality of the device. These effects do not affect the functionality of the device and are therefore not considered as defects in terms of our warranty conditions.